
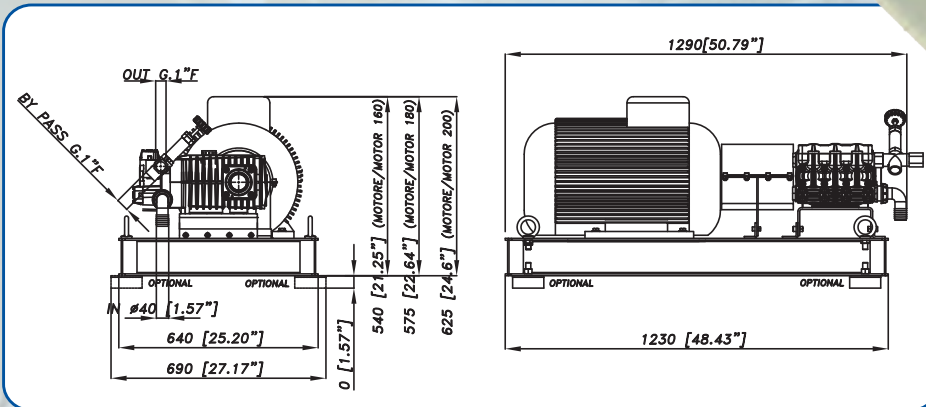


DATI TECNICI GRUPPI ELETTROPOMPA CK 3003

CK 3003 POWER UNITS DATA SHEET

CARATTERISTICHE - SPECIFICATIONS

IN	DIAMETER PIPE FITTING	∅	1" 1/4 BSP 40mm 1.57"
	PRESS.	Min.	-0.2 Bar -3 PSI
		Max.	6 bar 87 PSI
TEMP.	Max.	60° C. 140° F.	
OUT	DIAMETER	∅	3/4" BSP
	VALVE	Out	1" BSP
By-pass		1" BSP	
OIL	SAE 75W 90		2.8 litri 0.74 U.S.G.

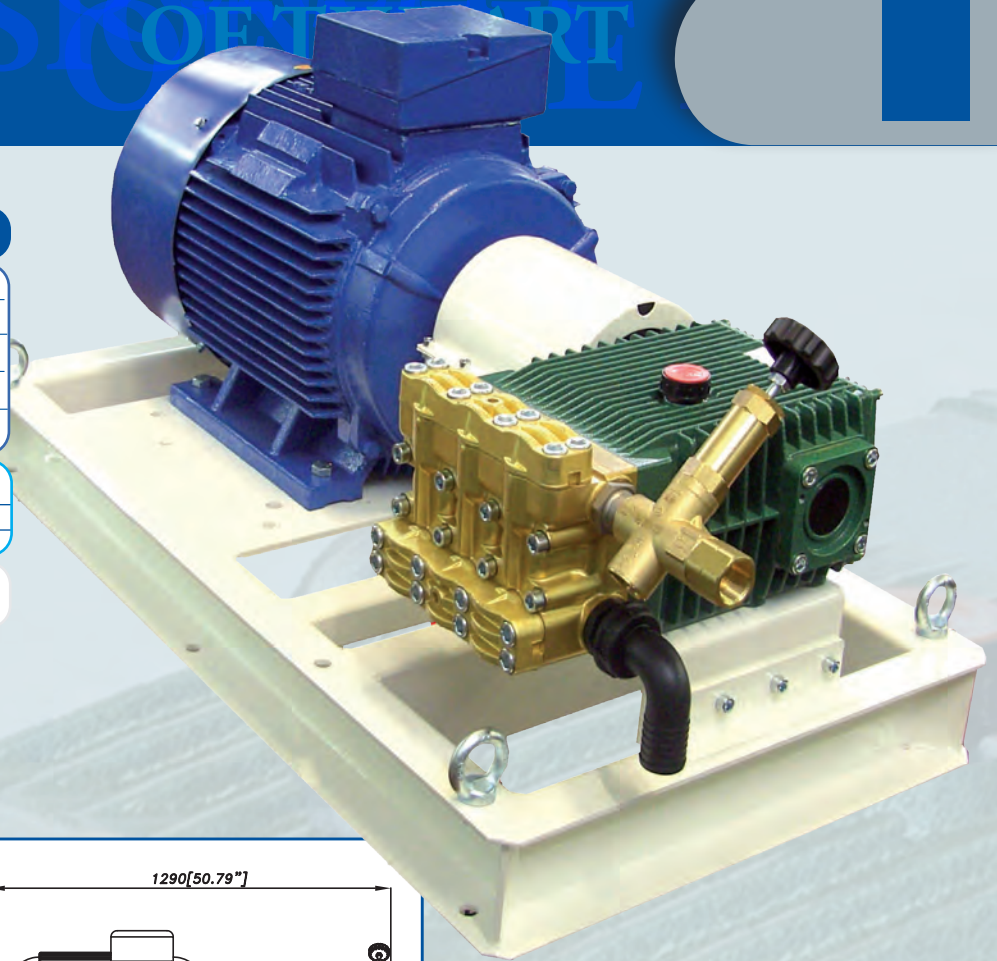

BASAMENTO / BASE ASSEMBLY

DIMENSIONI SIZE	mm / inch	1230x640 / 48.43"x25.20"
PESO WEIGHT	Kg / lbs	65 / 143

CARATTERISTICHE - FEATURES

CODICI CODES			POMPA PUMP	MOTORE TRIFASE THREE-PHASE MOTOR			RPM	PRESSIONE PRESSURE		PORTATA FLOW		PESO GRUPPO COMPLETO POWER UNIT WEIGHT	
GRUPPO ELETTROPOMPA POWER UNIT (A)	BASAMENTO BASE (B)	GRUPPO COMPLETO COMPLETE POWER UNITS (A+B)		50Hz-400V	kW	A		Bar	PSI	L/min	GPM	Kg	LBS
73.9103.97.3	73.9502.97.3	73.9203.97.3	CK 2216	160L 4 POLI	15	29.5	1450	100	1450	63	16.6	270	594
73.9106.97.3	73.9500.97.3	73.9206.97.3	CK 2216	180L 4 POLI	22	42.0	1450	150	2175	63	16.6	326	717
73.9104.97.3	73.9500.97.3	73.9204.97.3	CK 2220	180M 4 POLI	18,5	35.0	1450	100	1450	80	21.1	312	686
73.9107.97.3	73.9501.97.3	73.9207.97.3	CK 2220	200L 4 POLI	30	56.6	1450	150	2175	80	21.1	382	840,4
73.9105.97.3	73.9500.97.3	73.9205.97.3	CKL 2226	180L 4 POLI	22	42.0	1450	100	1450	97	25.7	326	717
73.9108.97.3	73.9501.97.3	73.9208.97.3	CKL 2226	200L 4 POLI	30	56.6	1450	150	2175	97	25.7	382	840.4
73.9109.97.3	73.9501.97.3	73.9209.97.3	CKL 2233	200L 4 POLI	30	56.6	1450	120	1740	126	33.2	382	840.4
73.9100.97.3	73.9501.97.3	73.9200.97.3	CK 1224	200L 6 POLI	18,5	37.3	975	80	1160	97	25.7	371	816
73.9101.97.3	73.9501.97.3	73.9201.97.3	CK 1229	200L 6 POLI	22	43,9	975	80	1160	124	32.7	380	836
73.9102.97.3	73.9501.97.3	73.9202.97.3	CK 1235	200L 6 POLI	22	43,9	975	70	1015	150	39.7	380	836